Truelev

Controller

Low Shear Applications

The revolutionary Truelev with its bearing-less fully levitating technology is perfect for shear sensitive products. This product is our high-end mixer that offers a unique control and measuring capability.

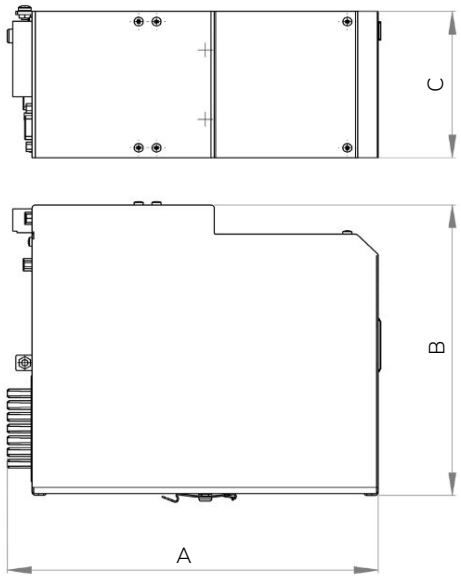



Measurements

Mixer Model	Article Number	A mm (in)	B mm (in)	C mm (in)	Weight kg (lb)
ZF100	ZF12015-04928	228 (8.98)	189 (7.44)	95 (3.74)	2.9 (6.40)
ZFM100	ZFM12015-06666				
ZF160	ZF16015-04933				
ZFM160	ZFM16015-06668				

General information

Power	2 kW/2.7hp @ 50/60Hz	
Voltage	Single Phase	200-240 VAC ±10% (180-264 VAC)
	3 Phase	Delta voltage: 200-240 VAC ±10% (180-264 VAC) Star voltage: 115-139 VAC ±10% (104-153 VAC)
Certified	CE	
Protection class	IP 20	
Environment temp	0°C - 40°C (32°F - 104°F)	
Communication interface	RS 232 or PLC	
Mechanical installation	2 DIN rail brackets on the housing	
Packing and Marking	Items are individually packed and for traceability purposes marked with item & id no.	
Quality Assurance	Metenova Quality Assurance system ensures the quality and traceability at all stages of the process.	

Mete Nova

A REPLIGEN COMPANY

	Option	Article Number	Description	Length
1	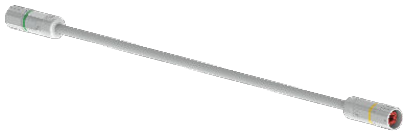	ZF16015-02549	ZF/ZFM Interconnect Cable	0,5 meter
		ZF16015-02550		3 meters
		ZF16015-02551		5 meters
		ZF16015-02552		7 meters
		ZF16015-02553		10 meters
2		ZF16015-02544	ZF/ZFM Adapter Cable	0,5 meter
		ZF16015-02545		3 meters
		ZF16015-02546		5 meters
		ZF16015-02547		7 meters
		ZF16015-02548		10 meters
3		ZF16015-02554	ZF/ZFM Hand Held Interface	

Mete Nova
A REPLIGEN COMPANY

Metenova AB
Norra Ågatan 32, SE-43135
Mölndal, Sweden
Phone +46(0)31 3359500
www.metenova.com
info@metenova.com

Metenova America INC
P.O Box 398
Glen Gardner, NJ 08826
USA
Phone +1(908)537 4199
info@metenova.com

The information in this publication is subject to change without prior notice. The information in this document is believed to be complete and accurate at the time of publication. Metenova assumes no responsibility for any errors that may appear in this document.
Customer is responsible for determining Metenova's product will perform suitable in the intended application